



**DS24TW HL**

## Features

- Predestined for industrial applications in the harshest environments
- Carbon contact technology
- Keys are freely programmable
- Backlit key symbols are done by laser etching
- Any layout is possible
- Any customer-specific adaptations can be implemented on request
- Backlight available in different colours
- Available with and without mounting bolts

## Mechanical Data



- Dimensions of 122 x 107 x 20 mm
- 2 mm travel keys with tactile feel
- Operation force 0,65 N
- 24 keys in compact layout
- Ergonomic keycaps
- Durability > 10 million ops.
- Storage temperature -40°C - +80°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

## Electrical Data

- Connection options: USB 2.0 or PS/2
- Power supply + 5 V/DC, 80 mA
- 2-key rollover
- Autorepeat
- CE Compliant
- RoHS/Reach Compliant

  
control touch trust

## Drawing

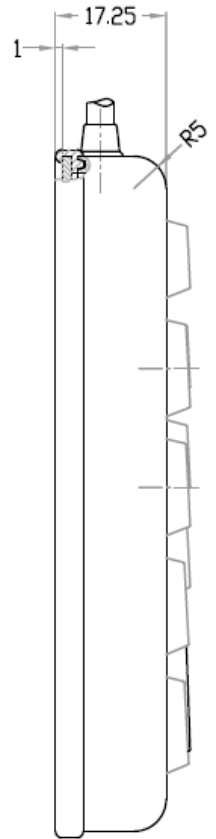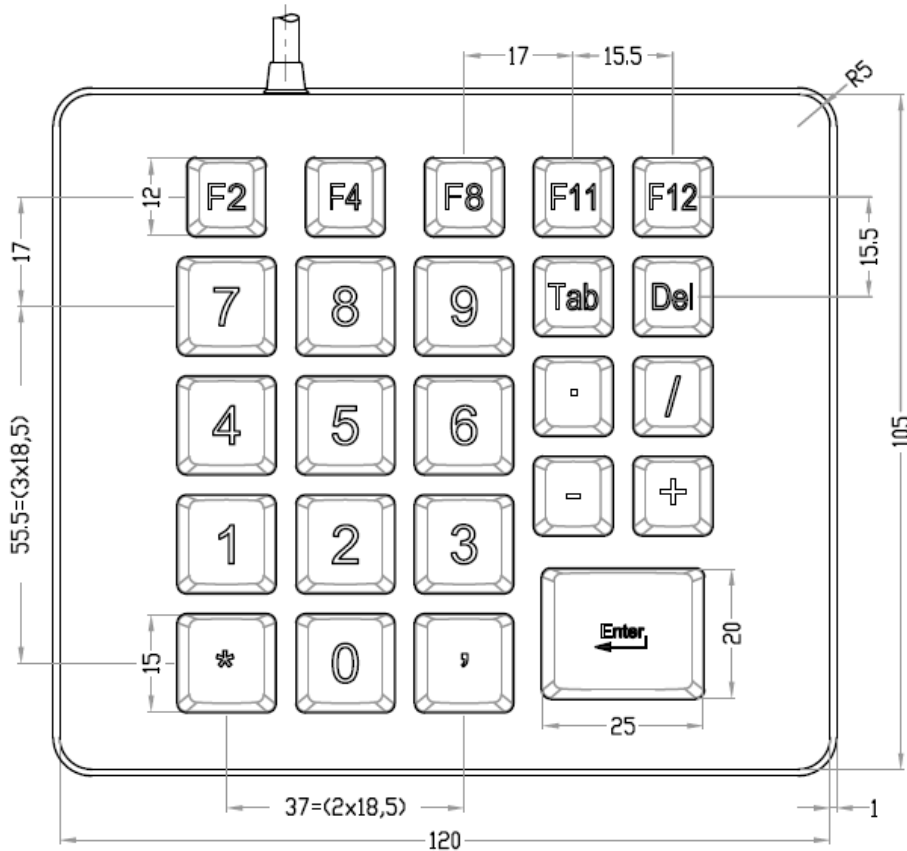

## Versions



DS024TW HL

- Standard housing



DS024TW HL

- With mounting bolts

**PRINTEC**  
**DS**  
control touch trust